

wall mounted LM range



Wireless R.C.



Wired R.C.



Simple
Controller

Stylish and slim, these elegant wall mounted units complement any interior décor and are suitable for a variety of applications. The Fujitsu LM wall mounted air conditioners are all A/A rated with a host of features as standard. The quiet yet powerful units provide rapid cooling and heating to ensure the space reaches the required condition in the minimum time and at maximum efficiency.

- Nominal cooling: 2.00kW to 4.00kW (4 models)
- High SEER / SCOP Ratings
- 10°C Heat Operation
- Powerful Operation
- Ultra-quiet

Specifications

	Indoor	ASYG07LMCA	ASYG09LMCA	ASYG12LMCA	ASYG14LMCA
	Outdoor	AOYG07LMCA	AOYG09LMCA	AOYG12LMCA	AOYG14LMCA
Nominal Capacity (kW)	Cooling	2.00 (0.50-3.00)	2.50 (0.50-3.20)	3.40 (0.90-3.90)	4.00 (0.90-4.40)
	Heating	3.00 (0.50-3.40)	3.20 (0.50-4.00)	4.00 (0.90-5.30)	5.00 (0.90-6.00)
UK Total / Sensible Cooling *		1.94 / 1.30	2.42 / 1.59	3.30 / 2.14	3.87 / 2.52
Power Consumption (kW)	Cooling	0.47	0.65	0.97	1.14
	Heating	0.69	0.73	1.02	1.36
EER / COP (Nominal Conditions)		4.30 / 4.38	3.85 / 4.38	3.50 / 3.92	3.52 / 3.66
Pdesign (kW) @ -10°C	Cooling	2.00	2.50	3.40	4.00
	Heating	2.30	2.40	3.50	3.90
SEER	Cooling	6.80	7.00	7.00	6.90
SCOP	Heating (Average)	4.10	4.10	4.00	4.00
Energy Efficiency Class	Cooling	A++	A++	A++	A++
	Heating (Average)	A+	A+	A+	A+
Annual Energy Consumption (kWh/a)	Cooling	103	125	170	203
	Heating	786	820	1225	1365
Moisture Removal	l/h	1.00	1.30	1.80	2.10
Dimensions (HxWxD) mm	Inner	268x840x203	268x840x203	268x840x203	268x840x203
	Outer	535x663x293	535x663x293	535x663x293	540x790x290
Net Weight (kg)	Inner	9	9	9	9
	Outer	21	21	26	34
Room Air Circulation (high) m3/h	Inner	750	750	750	750
	Outer	1670	1670	1830	1800
Power Supply	V-PH-Hz	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50
Power Supply To		Outdoor	Outdoor	Outdoor	Outdoor
Running Current (A)	Cooling	2.50	3.20	4.60	5.30
	Heating	3.30	3.50	4.80	6.30
Starting Current	A	3.30	3.50	4.80	6.30
Suggested MCB/Fuse	A	10	10	10	10
Interconnecting Cable		3 + E	3 + E	3 + E	3 + E
Remote Control Type		Wireless	Wireless	Wireless	Wireless
Sound Pressure (dB(A) Cooling)	Indoor Q/L/M/H	21 / 32 / 40 / 43	21 / 32 / 40 / 43	21 / 32 / 40 / 43	25 / 33 / 40 / 44
	Outdoor H	45	45	50	49
Sound Power (dB(A) Cooling)	Indoor H	59	59	59	60
	Outdoor H	58	58	61	63
Max Pipe Length	m	20	20	20	20
Max Height Difference	m	15	15	15	15
Refrigerant Charge	m	15	15	15	15
Additional Refrigerant Charge	g/m	20	20	20	20
Pipe Size (inches)	Gas	3/8 (9.52mm)	3/8 (9.52mm)	3/8 (9.52mm)	1/2 (12.70mm)
	Liquid	1/4 (6.35mm)	1/4 (6.35mm)	1/4 (6.35mm)	1/4 (6.35mm)
Operating Range °CDB	Cooling	-10 ~ 43	-10 ~ 43	-10 ~ 43	-10 ~ 43
	Heating	-15 ~ 24	-15 ~ 24	-15 ~ 24	-15 ~ 24
Refrigerant		R410A	R410A	R410A	R410A


Optional Parts

Wired Remote Controller:	UTYRVNYM	(Must use with Communication Kit below)
Simple Remote Controller:	UTYRSNYM	(Must use with Communication Kit below)
Communication Kit:	UTYXCBXZ2	
External Connect Kit	UTYXWZXZ5	
Modus Interface	FJRCMBS1	
KNX Interface	FJRCKNX1	
WiFi Interface	FJRCWIF1	

* UK Cooling: indoor temperature 23°CDB / 16°CWB and outdoor temperature 30°C

Dimensions Models : ASYG07LMCA / ASYG09LMCA / ASYG12LMCA / ASYG14LMCA

(Unit : mm)

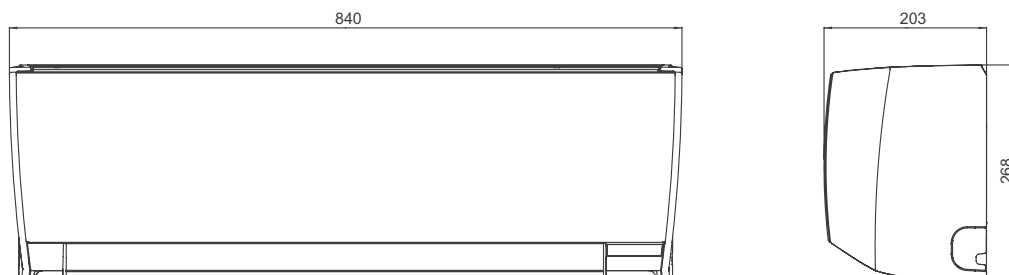

The company reserves the right to make any variation in specification to the equipment described or to withdraw or replace products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form any part of any contract. All equipment and services are supplied subject to FG Eurofred's Terms and Conditions of Sale.

All prices shown exclude VAT.



ISO 9001
Certificate number: 02-020001
Fujitsu General (Thailand) Co., Ltd.

ISO 14001
Certificate number: 02-020001
Fujitsu General (Thailand) Co., Ltd.

ISO 9001
Certificate number: 02-020001
Fujitsu General (Thailand) Co., Ltd.

ISO 14001
Certificate number: 02-020001
Fujitsu General (Thailand) Co., Ltd.

Fujitsu air conditioning products are available from FG Eurofred and local distributors.

FUJITSU
AIR CONDITIONERS